


A low-angle, upward-looking photograph of a diverse group of people holding their hands together in a circle. The individuals are looking up towards the sky, which is filled with bright, dappled sunlight filtering through green foliage. The people are wearing various casual clothing, including plaid shirts and sweaters. Many of their wrists are adorned with different types of bracelets and watches. The overall mood is one of unity, positivity, and shared experience.

boundless



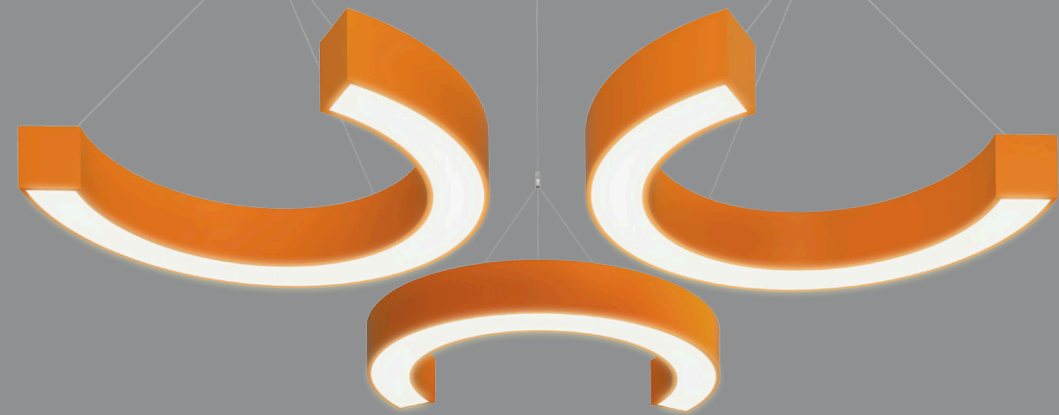


**IMAGINE IT. THEN INSTALL IT. WITH FOUR NEW DESIGNS,
SIX MORE COLORS AND A MASSIVE 5' ROUND.**

Our original line was a smash hit with designers and architects, so we've doubled our offering – giving you more possibilities than ever. We've applied a sleek, seamless European aesthetic to the entire collection. And now, circles and squares are limited only by the boundaries of your imagination – which leaves a whole lot of room for trying something completely new.



SKY OCULUS SERIES | Let the mixing and matching begin.


- The entire Sky Oculus series utilizes a uniform extruded aluminum housing:
- Sleek and seamless Euro-styled body and lens
 - 5" height and sharp .5" trim detail
 - 4" aperture lens for O, C and Quad Frame
 - All with seamless and evenly lit flat white acrylic lenses and independent uplight

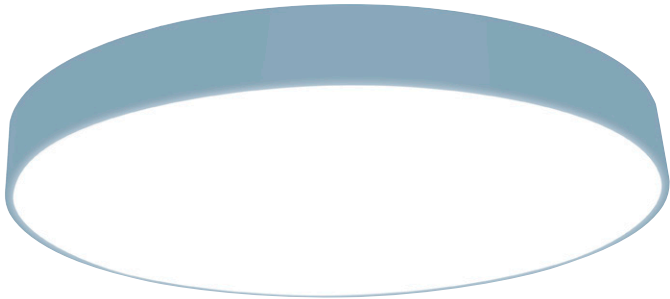

P4000 SKY

“Like you lassoed some daylight and brought it inside”


- 18", 2', 3' and 4' diameters
- Semi-recessed option (Hard ceilings and **NOW T-BAR**)

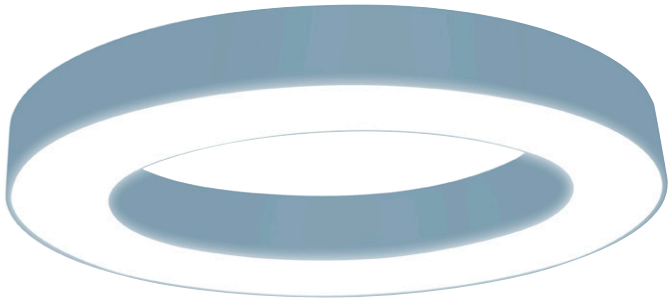

O

“There’s a reason WOW has an O in it”


- 2', 3' and 4' diameters
- Decorative but powerful enough to light space

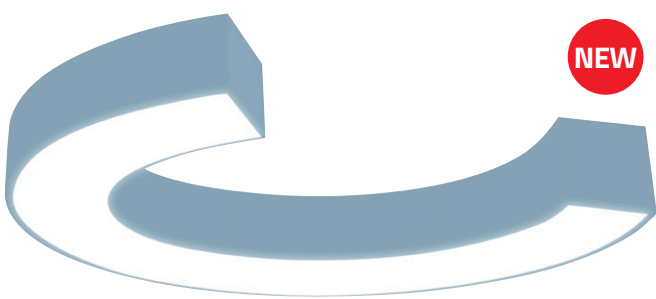

C

“The not-quite-a-circle shape, just for kicks”


- 2', 3' and 4' diameters

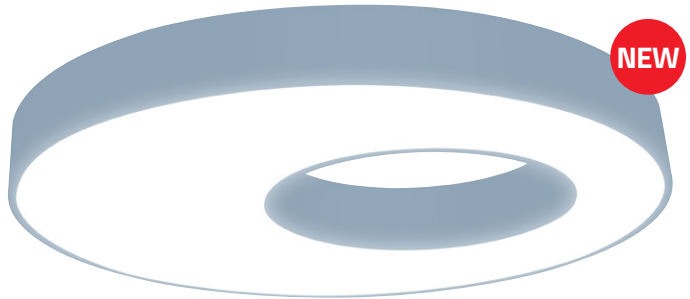

OLIVE

“For fans of the asymmetrical”

- 3' and 4' diameters

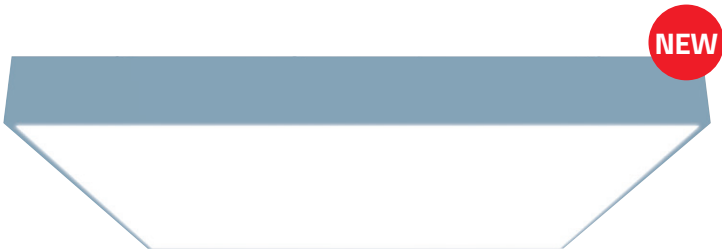

QUAD

“Pretty much the P4000 SKY, but square”

- 2', 3' and 4' squares, 1'x 4', 2'x 4'




QUAD FRAME

“Prefabricated patterns”

- 2', 3' and 4' squares
- Decorative but powerful enough to light space

Our original big rounds, introduced in 1971 — now available as a 5' pendant.

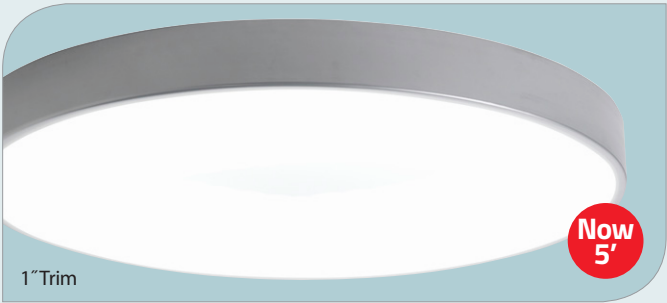

P3900

- 18", 2', 3', 4' and **NOW 5'** diameters
- Hand-spun steel housing
- Independent uplight
- Convex or flat, white acrylic lens



P8900

- 12", 2', 3', 4', 5', 6' diameters
- T-bar or hard ceilings
- Concave, convex or flat, white acrylic lens



SKY OCULUS SERIES | No detail left unconsidered.

While unique in silhouette, all six extruded aluminum Sky Oculus fixtures have identical height (5") and trim (.5"), making it easy to mix and match at will, while maintaining a cohesive look. Smooth, continuous housings and lenses give you a seamless, streamlined aesthetic.





OLIVE | The pendant that's not afraid to be playful.

More than just a series of great-looking fixtures, our decorative pendants are highly efficient luminaries (often exceeding 100 lumens/watt), excellent for general illumination with optional independent uplight.



CLIENT | Bellhops, Knoxville, TN

SEMI-RECESSED | Bring on the drama by breaking the plane.

Wanting to make a signature statement?

Our playful P4000 Sky's shine like the stars they are in either hard or T-bar ceilings, and can be tilted up to 15° for a touch of whimsy. Or install them semi-recessed at various heights – they're easily adjustable after installation.

NOW AVAILABLE FOR BOTH
HARD OR T-BAR CEILINGS






P9000 SKY | Nearly disappears into its environment
 CLIENT | Guarantee Trust, Glenview, IL — ARCHITECT | TZS Design



P8900 | Up to 6' diameter
 CLIENT | Pacific Design Center, Beverly Hills, CA

ALMOST INVISIBLE | Create an overhead glow with P9000 & P8900 'Sky Lights'.

Give your space the subtle warmth of natural light emanating from the architecture. Our P9000 Sky virtually melts into its environment with a minimal trim or invisible trimless flange for hard ceilings — plus our P8900 is available up to 6' diameters.

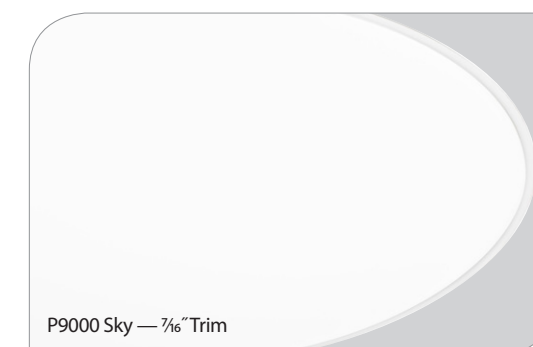

P9000 Sky — 3/16" Trim



P8900 — 2" Trim







CLIENT | BitTitan, Seattle, WI ARCHITECT | JPC Architects



Make a splash with a two-tone O!

COLOR | Fast lead times and no set-up fees.

Our in-house powder coating allows us to offer a broad array of colors with remarkably speedy lead times. Don't see the color you want? Specify an RAL color instead. Looking to make a splash? Go all out and specify the inner and outer rings of our O, Olive or Quad Frame in different colors for a playful look.

PREMIUM COLORS | New Matte Finishes...

YSW – Seashell White (Matte)	YCH – Champagne (Metallic)	YSL – Silver (Metallic)
YPE – Pewter (Matte)	YRG – Rain Grey (Gloss)	YSTM – Storm Grey (Matte)
YBK – Interior Black (Matte)	YBB – Black (Semi-Gloss)	YSKM – Sky (Matte)
YMB – Military Blue (Matte)	YIB – Interstate Blue (Matte)	YSAM – Sapphire (Matte)
YFGM – Forest Green (Matte)	YBR – Bronze (Matte)	YBY – Boysenberry (Matte)
YSRM – Sunset Red (Matte)	YOR – Orange (Matte)	YDAM – Daffodil (Matte)

Please note that as of May 1st, 2017 the following colors have been changed to matte finishes; YSTM, YSKM, YFGM, YSRM, YDAM. To match a previous order with a glossy finish please remove the 'M', e.g. 'YST' instead of 'YSTM'.

For paint chip samples, please email: info@prulite.com

prulite.com / 17 /





P4030 SKY | Ideal for playful patterns.

CLIENT | USC, Los Angeles, CA ARCHITECT | Steinberg PHOTOGRAPHER | Photekt

P4000 SKY



SERIES	LED COLOR	OUTPUT	SHIELDING	COLOR/ FINISH	DISTRIBU- TION	CIRCUIT- ING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
P4018 18" Dia. (11 lbs) P4020 2" Dia. (22 lbs) P4030 3" Dia. (35 lbs) P4040 4" Dia. (50 lbs)	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High PROG Program- mable Light Output (Specify desired lm or w/ fixture)	FWA Flat White Acrylic Lens (Standard) VWA Convex White Acrylic Lens (1" Max drop)	TMW Textured Matte White (Standard) Y__ Gloss White Premium Color CC Custom Color NOTES: Top plate is always Gloss White for optical perfor- mance. All canopies are painted the same color as the fixture unless specified otherwise.	D1 Direct D9 Semi-Direct (20-30% uplight, NA Surface) NOTE: NA - 18", 2" D9 DC LO 18" minimum from fixture to ceiling recom- mended.	SC Single Circuit DC Dual Circuit (D9 only)	UNV (120- 277) 347 (Emergen- cy battery requires a Step Down trans- former)	SUR Surface Mount (NA with T-Bar) MPCA Monopoint Mounting (For 18" & 2" - 9" min. from fixt. to ceiling, for 3' & 4' fixt. 18" from fixt. to ceiling) CA48", 96" or 144" Aircraft Cable (Adjustable) SSC Top-Swivel Stem Mount for Hard Ceilings (Specify length in inches) NOTE: P4018 SUR or MPCA only	X1 T-Bar Exposed (Standard) X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming, Osram DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5%, Lutron (Ecosystem) LDE1 1%, Lutron (Soft Fade to Black, Ecosystem) L3DA 1%, Lutron, 3 Wire ECO 1% 0-10v, EldoLED ECDA 1% DALI, EldoLED SOLO 0.1% 0-10v, EldoLED (Dim to Dark) SODA 0.1% DALI, EldoLED (Dim to Dark)	EML Emergency Battery, Low (P4018: 400; P4020: 500; P4030 & P4040: 900 delivered lumens) EMH Emergency Battery, High (NA - 18" & 2", P4030 & P4040: 1250 delivered lumens) IBC Insulated Braided Cord PRUBIN Meticulous Binning and Labeling Every LED Board With- in a 2-Step Mac- Adams Ellipse

SIZES



OLIVE

SERIES	LED COLOR	OUTPUT	SHIELD- ING	COLOR/ FINISH	DISTRIBU- TION	CIRCUIT- ING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
OLV-30 3" Dia. OLV-40 4" Dia.	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High PROG Program- mable Light Output (Specify desired lm or w/ fixture)	FWA Flat White Acrylic Lens	TMW Textured Matte White (Standard) Y__ Gloss White Premium Color CC Custom Color NOTE: All canopies are painted the same color as the fixture unless specified otherwise	D1 Direct Solid Top D9 Semi-Direct NOTE: Only 1 row of LEDs, 17% Up, 83% Down	SC Single Circuit DC Dual Circuit (D9 only)	UNV (120-277) 347 (Emergen- cy battery requires a Step Down transform- er)	SUR Surface Mount (1" Standoff from ceiling, NA with T-Bar) MPCA Monopoint Mounting (18" min from fixture to ceiling) NOTE: Fixture may spin with air movement CA48", 96" or 144" Aircraft Cable (Adjustable) SSC Top-Swivel Stem Mount (X3 only - Specify length)	X1 T-Bar Exposed X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming, STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5%, Lutron (Ecosystem) LDE1 1%, Lutron (Soft Fade to Black, Ecosystem) L3DA 1%, Lutron, 3 Wire ECO 1% 0-10v, EldoLED ECDA 1% DALI, EldoLED SOLO 0.1% 0-10v, EldoLED (Dim to Dark) SODA 0.1% DALI, EldoLED (Dim to Dark)	EML Emergency Battery, Low (400 delivered lumens, available in 4" only, unless remote) EMH Emergency Battery, High (550 delivered lumens) IBC Insulated Braided Cord PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAd- ams Ellipse


SIZES



O

SERIES	LED COLOR	OUTPUT	SHIELD- ING	COLOR/ FINISH	DISTRIBU- TION	CIRCUIT- ING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
O-20 2" Dia. O-30 3" Dia. O-40 4" Dia.	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High PROG Programma- ble Light Output (Specify desired lm or w/ fixture)	FWA Flat White Acrylic Lens	TMW Textured Matte White Y__ Gloss White (Standard) Y__ Premium Color CC Custom Color NOTE: All canopies are painted the same color as the fixture unless specified otherwise	D1 Direct Solid Top D9 Semi-Direct NOTE: Only 1 row of LEDs, 17% Up, 83% Down. Recommended distance to hang from ceiling to top of fixture to avoid hotspots: O-20: 18", O-30: 24", O-40: 30"	SC Single Circuit DC Dual Circuit (D9 only)	UNV (120- 277) 347 (Emergen- cy battery requires a Step Down trans- former)	SUR Surface Mount (1" Standoff from ceiling, NA with T-Bar) MPCA Monopoint Mounting (18" min from fixture to ceiling) CA48", 96" or 144" Aircraft Cable (Adjustable) SSC Top-Swivel Stem Mount (X3 only - Specify length)	X1 T-Bar Exposed X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5%, Lutron (Ecosystem) LDE1 1%, Lutron (Soft Fade to Black, Ecosystem) L3DA 1%, Lutron, 3 Wire ECO 1% 0-10v, EldoLED ECDA 1% DALI, EldoLED SOLO 0.1% 0-10v, EldoLED (Dim to Dark) SODA 0.1% DALI, EldoLED (Dim to Dark)	EML* Emergency Battery, Low (400 delivered lumens) EMH* Emergency Battery, High (550 delivered lumens) IBC Insulated Braided Cord PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAdams Ellipse *SUR -remote mount only, within 30' of fixture, NA on 2'

SIZES

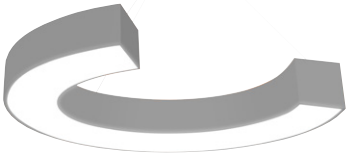

C

SERIES	LED COLOR	OUTPUT	SHIELD- ING	COLOR/ FINISH	DISTRIBU- TION	CIRCUIT- ING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
C-20 2" Dia. C-30 3" Dia. C-40 4" Dia.	LED27 2700K (90CRI) LED3 3000K LED35 3500K LED4 4000K LED3-90 90CRI LED35-90 90CRI LED4-90 90CRI	LO Low MO Medium SO Standard HO High PROG Programmable Light Output (Specify desired lm or w/ fixture)	FWA Flat White Acrylic Lens	TMW Textured Matte White (Standard) Y__ Gloss White Premium Color CC Custom Color NOTE: All canopies are painted the same color as the fixture unless specified otherwise	D1 Direct Solid Top D9 Semi-Direct NOTE: Only 1 row of LEDs, 17% Up, 83% Down	SC Single Circuit DC Dual Circuit (D9 only)	UNV (120-277) 347 (Emergen- cy battery requires a Step Down transform- er)	SUR Surface Mount (1" Standoff from ceiling, NA with T-Bar) MPCA Monopoint Mounting (18" min from fixture to ceiling) NOTE: Fixture may spin with air movement CA48", 96" or 144" Aircraft Cable (Adjustable) SSC Top-Swivel Stem Mount (X3 only - Specify length)	X1 T-Bar X3 Hard Ceiling X6 Slot Grid	ND Non-Dimming DM10 0-10v, 10% Dimming (Standard) DM01 0-10v, 1% Dimming STEP Step Dimming, 100-50-Off, Osram NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory LDE5 5%, Lutron (Ecosystem) LDE1 1%, Lutron (Soft Fade to Black, Ecosystem) L3DA 1%, Lutron, 3 Wire ECO 1% 0-10v, EldoLED ECDA 1% DALI, EldoLED SOLO 0.1% 0-10v, EldoLED (Dim to Dark) SODA 0.1% DALI, EldoLED (Dim to Dark)	EML* Emergency Battery, Low (400 delivered lumens, available in 4" only, unless remote) EMH* Emergency Battery, High (550 delivered lumens) IBC Insulated Braided Cord PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAd- ams Ellipse *SUR -remote mount only, within 30' of fixture


SIZES



QUAD

SERIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/ FINISH	DISTRI- BUTION	CIRCU- ITING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
		—									
QD-14 1" x 4"	LED27 2700K (90CRI)	LO Low	FWA White Acrylic Lens (Flat)	TMW Textured Matte White (Standard)	D1 Direct Solid Top	SC Single Circuit	UNV (120-277)	SUR Surface Mount (1" Standoff from ceiling, NA with T-Bar)	X1 T-Bar Exposed	ND Non-Dimming	EML* Emergency Battery, Low (400 delivered lumens, available in 4' only, unless remote)
QD-22 2" x 2"	LED3 3000K	MO Medium			NOTE: Only 1 row of LEDs	DC Dual Circuit (D9 only)	347 (Emergen- cy battery requires a Step Down transform- er)	4PM Square 4 Point Mounting - 96" or 200" Cable (Min 18" from fixture to ceiling)	X3 Hard Ceiling	DM10 0-10v, 10% Dimming (Standard)	
QD-24 2" x 4"	LED35 3500K	SO Standard		YGW Gloss White	D9 Semi- Direct			NOTE: 4PM-X1/X6 requires additional part by others, www.erico.com 512HDFM35	X6 Slot Grid	DM01 0-10v, 1% Dimming	
QD-33 3" x 3"	LED4 4000K	HO High		Y__ Premium Color	NOTE: Only 1 row of LEDs, 17% Up, 83% Down			NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory		STEP Step Dimming, 100-50-Off, Osram	EMH* Emergency Battery, High (550 delivered lumens)
QD-44 4" x 4"	LED3-90 90CRI	PROG Programma- ble Light Output (Specify desired lm or w/fixture)		CC Custom Color				MPCA Monopoint Mounting (Adj- 36" min from fixture to ceiling)		LDE5 5%, Lutron (Ecosystem)	IBC Insulated Braided Cord
	LED35- 90 90CRI			NOTE: All canopies are painted the same color as the fixture unless specified otherwise				NOTE: Fixture may spin with air movement		LDE1 1%, Lutron (Soft Fade to Black, Ecosystem)	PRUBIN Meticulous Binning and Labeling every LED Board within a 2-Step MacAd- ams Ellipse
	LED4-90 90CRI							CA48", 96" or 144" Aircraft Cable (Adjustable)		ECO 1% 0-10v, EldoLED	*SUR -remote mount only, within 30' of fixture
								SSC__ Top-Swivel Stem Mount (X3 only - Specify length)		ECDA 1% DALI, EldoLED	
										SOLO 0.1% 0-10v, EldoLED (Dim to Dark)	
										SODA 0.1% DALI, EldoLED (Dim to Dark)	

SIZES



QUAD FRAME

SERIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/ FINISH	DISTRI- BUTION	CIRCU- ITING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
		—									
QDF-22 2" x 2"	LED27 2700K (90CRI)	LO Low	FWA Flat White Acrylic Lens	TMW Textured Matte White (Standard)	D1 Direct Solid Top	SC Single Circuit	UNV (120- 277)	SUR Surface Mount (1" Standoff from ceiling, NA with T-Bar)	X1 T-Bar Exposed	ND Non-Dimming	EML* Emergency Battery, Low (400 delivered lumens, available in 4' only, unless remote)
QDF-33 3" x 3"	LED3 3000K	MO Medium			D9 Semi- Direct	DC Dual Circuit (D9 only)	347 (Emergen- cy battery requires a Step Down trans- former)	4PM Square 4 Point Mounting - 96" or 200" Cable (Min 18" from fixture to ceiling)	X3 Hard Ceiling	DM10 0-10v,10% Dimming (Standard)	
QDF-44 4" x 4"	LED35 3500K	SO Standard		YGW Gloss White	NOTE: Only 1 row of LEDs, 17% Up, 83% Down			NOTE: 4PM-X1/X6 requires additional part by others, www.erico.com 512HDFM35	X6 Slot Grid	DM01 0-10v, 1% Dimming	
	LED4 4000K	HO High		Y__ Premium Color				NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory		STEP Step Dimming, 100-50-Off, Osram	EMH* Emergency Battery, High (550 delivered lumens)
	LED3-90 90CRI	PROG Programma- ble Light Output (Specify desired lm or w/fixture)		CC Custom Color				MPCA Monopoint Mounting (Adj- 36" min from fixture to ceiling)		LDE5 5%, Lutron (Ecosystem)	IBC Insulated Braided Cord
	LED35- 90 90CRI			NOTE: All canopies are painted the same color as the fix- ture unless specified otherwise				NOTE: Fixture may spin with air movement		LDE1 1%, Lutron (Soft Fade to Black, Ecosystem)	PRUBIN Meticulous Binning and La- beling every LED Board within a 2-Step MacAd- ams Ellipse
	LED4-90 90CRI							CA48", 96" or 144" Aircraft Cable (Adjustable)		ECO 1% 0-10v, EldoLED	*SUR -remote mount only, within 30' of fixture
								SSC__ Top-Swivel Stem Mount (X3 only - Specify length)		ECDA 1% DALI, EldoLED	
										SOLO 0.1% 0-10v, EldoLED (Dim to Dark)	
										SODA 0.1% DALI, EldoLED (Dim to Dark)	

SIZES



P9000 SKY & P8900

SERIES	LED COLOR	OUTPUT	SHIELDING	TRIM COLOR	CIRCUITING	VOLT- AGE	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
P9012 12" Dia.	LED27 2700K (90CRI)	LO Low	P9000: FWA Flush-Flat White Acrylic Lens (Standard)	TMW Textured Matte White (Standard)	SC Single Circuit	UNV (120-277)	X1 T-Bar Exposed	ND Non-Dimming	EML Emergency Battery, Low (P9018: 400; P0920: 500; P9030 & P9040: 900 delivered lumens)
P9018 18" Dia.	LED3 3000K	MO Medium		YGW Gloss White					
P9020 2" Dia.	LED35 3500K	SO Standard							
P9030 3" Dia.	LED4 4000K	HO High		Y__ Premium Color					
P9040 4" Dia.	LED3-90 90CRI	PROG Program- mable Light Output (Specify desired lumens or watts per fixture)		CC Custom Color					
P8912 12" Dia.	LED35- 90 90CRI		P8900: CWA Concave White Acrylic (NA - 12" & 2")						
P8920 2" Dia.	LED4-90 90CRI								
P8930 3" Dia.				VWA Convex White Acrylic					
P8940 4" Dia.				FWA Flat White Acrylic (NA - 6")					
P8950 5" Dia.									
P8960 6" Dia.									

SIZES



P3900

SERIES	LED COLOR	OUTPUT	SHIELD-ING	COLOR/FINISH	DISTRI- BUTION	CIRCUIT- ING	VOLT- AGE	MOUNTING	CEILING SYSTEMS	DRIVERS	OPTIONS & CONTROLS
		—									
P3918 18" Dia.	LED27 2700K (90CRI)	LO Low	FWA Flat White Acrylic Lens	TMW Textured Matte White	D1 Direct	SC Single Circuit	UNV (120- 277)	SUR Surface Mount (NA with T-Bar)	X1 T-Bar Exposed	ND Non-Dimming	EML Emergency Battery, Low (P3920: 500; P3930 & P3940: 900 delivered lumens)
P3920 2" Dia.	LED3 3000K	MO Medium		YGW Gloss White (Standard)	D9 Semi- Direct (20-30% uplight, NA Surface)	DC Dual Circuit (D9 only)	347 (Emergen- cy battery requires a Step Down trans- former)	MPCA Monopoint Mounting (For 18" & 2" - 9" min. from fixt. to ceiling, for 3' & 4" fixt. 18" from fixt. to ceiling, NA with 5')	X3 Hard Ceiling	DM10 0-10v, 10% Dimming (Standard)	EMH Emergency Battery, High (NA - 18" and 2", P3930 & P3940: 1250 delivered lumens)
P3930 3" Dia.	LED35 3500K	SO Standard	VWA Convex White Acrylic Lens (1" Max Drop)	Y__ Premium Color				CA48", 96" or 144" Aircraft Cable (Adjustable)	X6 Slot Grid	DM01 0-10v, 1% Dimming	
P3940 4" Dia.	LED4 4000K	HO High		CC Custom Color				NOTES: Top plate is always Gloss White for optical performance All canopies are painted the same color as the fixture unless specified otherwise		STEP Step Dimming, 100-50-Off, Osram	IBC Insulated Braided Cord
P3950 5" Dia.	LED3- 90 90CRI	PROG Program- mable Light Output (Specify desired lm or w/ fixture)			NOTE: 18", 2" NA - D9 LO			SSC__ Top-Swivel Stem Mount for Hard Ceilings (Specify length in inches)		LDE5 5%, Lutron (Ecosystem)	PRUBIN Meticu- lous Binning and Labeling every LED Board within a 2-Step MacAd- ams Ellipse
	LED35- 90 90CRI							NOTE: Lumens and watts per foot may differ for STEP drivers, consult factory		LDE1 1%, Lutron (Soft Fade to Black, Ecosystem)	
	LED4- 90 90CRI							CA48", 96" or 144" Aircraft Cable (Adjustable)		LDE5 5%, Lutron (Ecosystem)	
								SSC__ Top-Swivel Stem Mount for Hard Ceilings (Specify length in inches)		LDE1 1%, Lutron (Soft Fade to Black, Ecosystem)	
								NOTE: P3918 SUR or MPCA only		L3DA 1%, Lutron, 3 Wire	
										ECO 1% 0-10v, EldoLED	
										ECDA 1% DALI, EldoLED	
										SOLO 0.1% 0-10v, EldoLED (Dim to Dark)	
										SODA 0.1% DALI, EldoLED (Dim to Dark)	

SIZES





CLIENT & ARCHITECT | KTGy, Irvine, CA

Products
Made in America **US★**



PRUDENTIAL LTG.

Light creates Life.
Create with Prudential Ltg.

1774 East 21st Street
Los Angeles, CA 90058

352 7th Avenue, 12th Floor
New York, NY 10001

TEL 213.746.0360
FAX 213.741.8590

TEL 908.658.4231

URL prulite.com
EMAIL info@prulite.com