



SSC-X1 | with Mounting Adaptor

Top-Swivel Stem Mount


INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

COMPATIBLE CEILING GRID SYSTEMS:

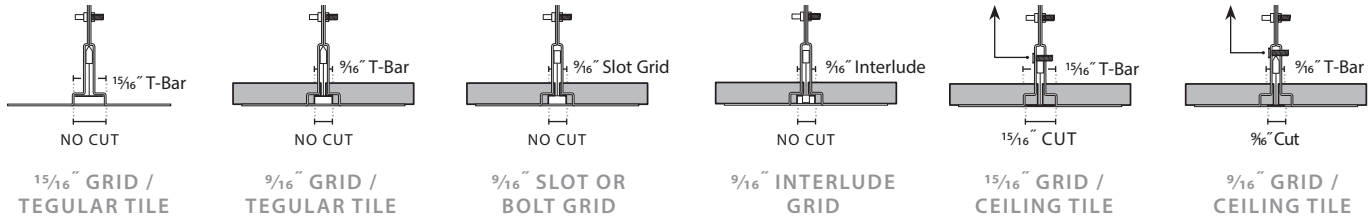

INSTALLATION:

- 1) Trim along edge of obround pilot slot for desired grid width. 9/16" or 15/16" option. (See Figure 1)






FIGURE 1: GRID CUT WIDTH

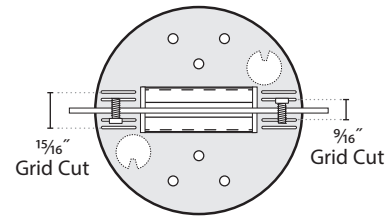

- 2) Drill 1/8" hole through pilot holes to secure adaptor flush with grid. (See figure 2).

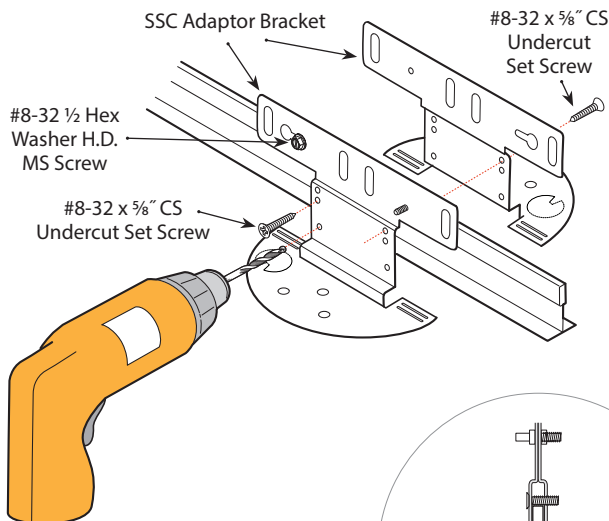

Drive #8-32 x 5/8" CS undercut set screw through pilot hole, grid and second adaptor. Be sure adaptor is flush with grid.





FIGURE 2

- 3)

Support Wire to Structural Member (BY OTHERS)

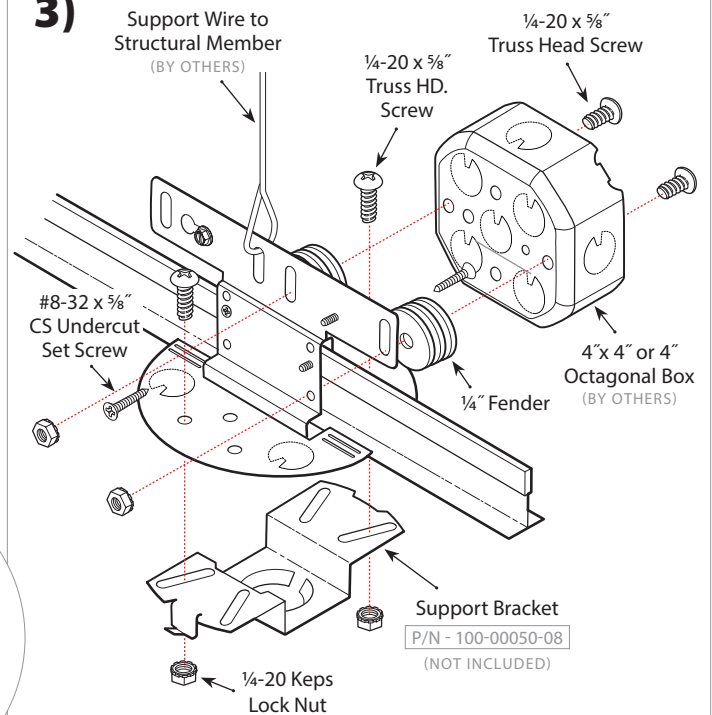

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved - All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



SSC-X1 | with Mounting Adaptor Top-Swivel Stem Mount


INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

4)

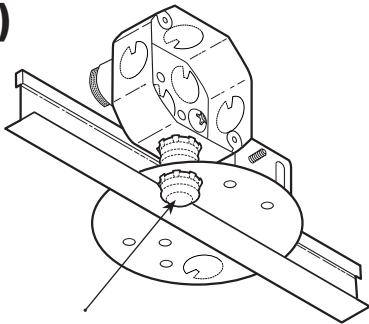


1/2" x 1 1/2" min. length nipple from
junction box to adaptor bracket
(Nipple and lock nuts by others)

5)



Attach support bracket
P/N 100-00050-08
(Not Included)

TRIM CEILING TILE

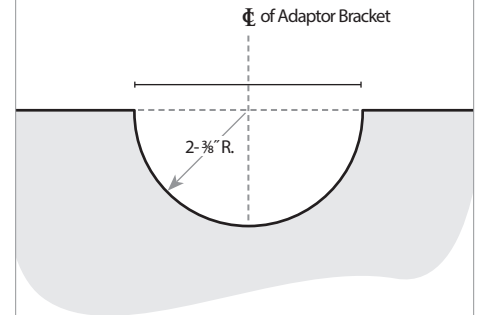

PARTS LIST

91382	SSC Adaptor Bracket	2
55232	1/4" Fender	8
100-00035-14	#8-32 1/2 Hex Washer H.D. MS Screw	2
100-00255-14	1/4-20 Keps Lock Nut	4
100-00250-14	1/4-20 x 5/8" Truss HD. Screw	4
100-00128-14	#8-32 x 5/8" CS Under Cut ST Screw	4

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058




SSC-X1 | with Mounting Adaptor Top-Swivel Stem Mount

INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

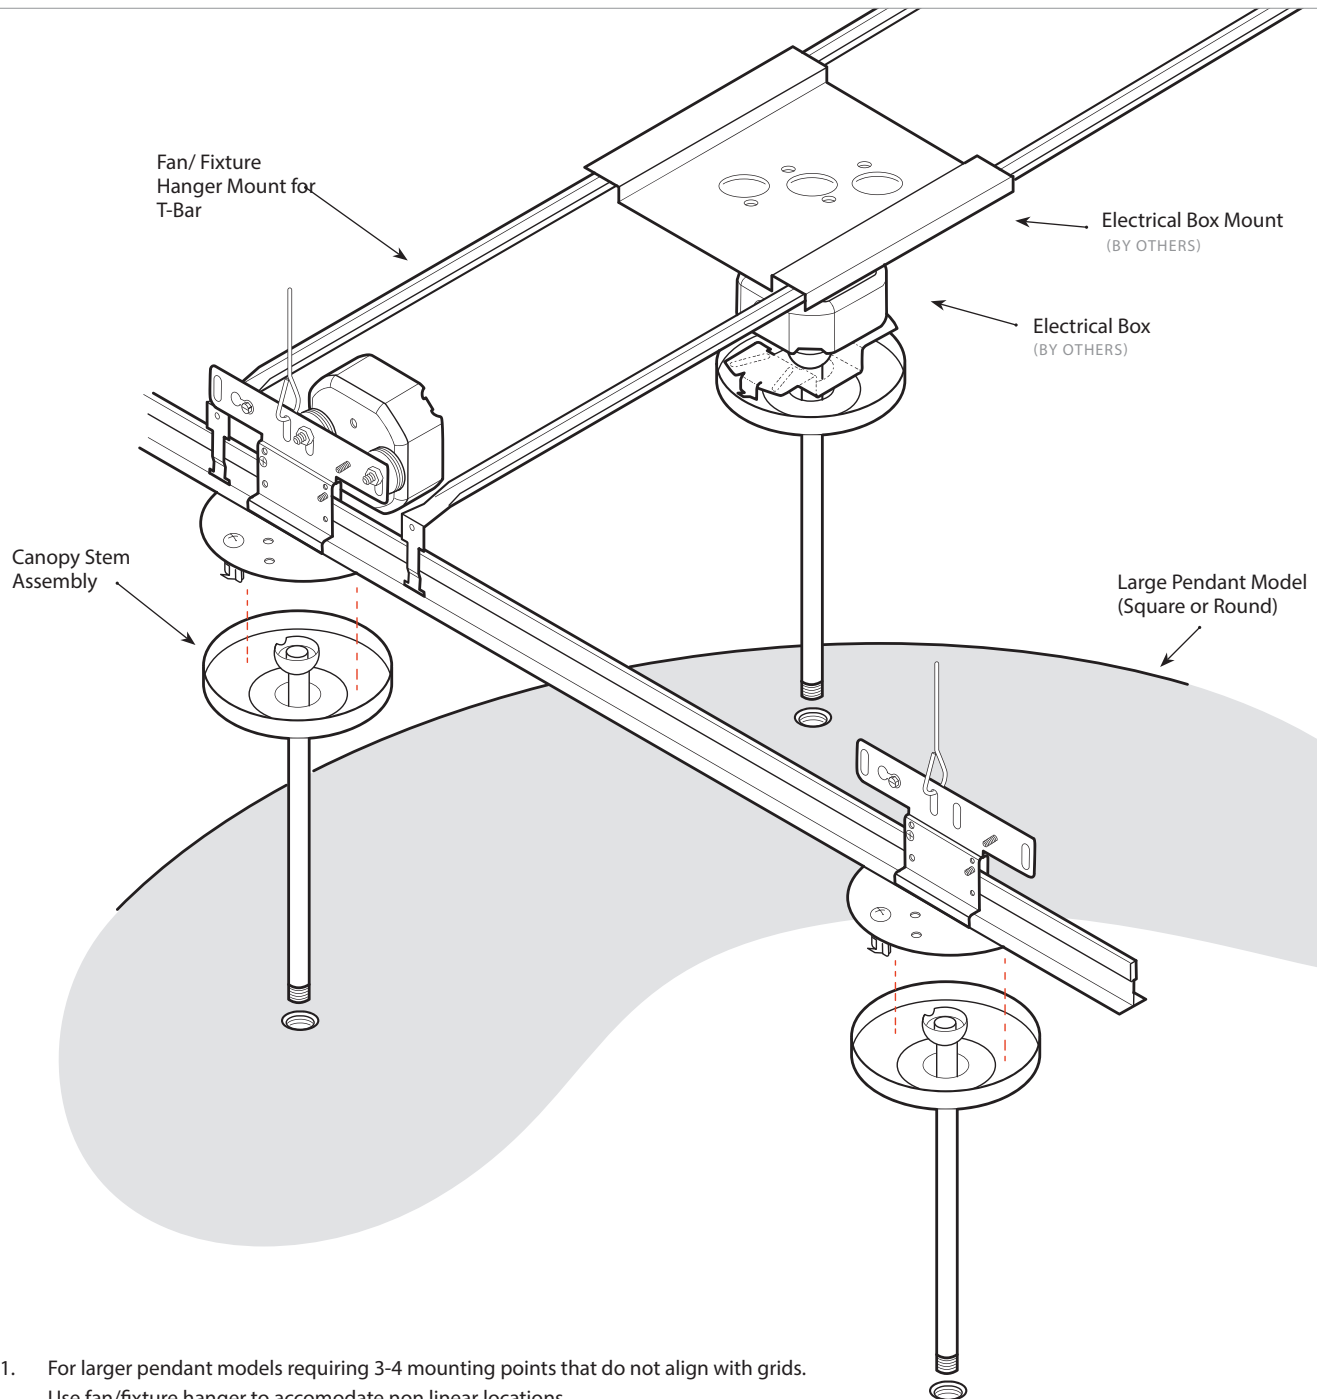

1. For larger pendant models requiring 3-4 mounting points that do not align with grids. Use fan/fixture hanger to accommodate non linear locations.
2. SSC mounting adaptor can be used for power feed and non-power feed pendants.

NOTE: For MicroWash surface mounting to T-Bar, the Erico Caddy (by others) can be used for off-grid mounting.

WWW.ERICO.COM/PART.ASP?PART=512HDFM70&APPLICATIONS=ACOUSTICAL#CATA

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058