



IES INDOOR REPORT

PHOTOMETRIC FILENAME : P4020-LED35-MO-D1.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] L041505601
 [TESTLAB] LIGHT LABORATORY, INC.
 [ISSUE DATE] 4/20/2015
 [MANUFAC] PRUDENTIAL LTG.
 [LUMCAT] P4020-LED35-MO-D1
 [LUMINAIRE] 26-1/4"DIA. X 5"H. LED LUMINAIRE
 [MORE] DIFFUSED LENS
 [BALLASTCAT] OSRAM OPTOTRONIC
 [BALLAST] INPUT: 120-277VAC
 [LAMPPOSITION] 0,0
 [LAMPCAT] N/A
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
 [INPUT] 120VAC
 [TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4140
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	77
Total Luminaire Watts	54
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.26
Spacing Criterion (90-270)	1.26
Spacing Criterion (Diagonal)	1.36
Basic Luminous Shape	Circular
Luminous Length (0-180)	2.04 ft (Diameter)
Luminous Width (90-270)	2.04 ft (Diameter)
Luminous Height	0.00 ft

IES INDOOR REPORT
PHOTOMETRIC FILENAME : P4020-LED35-MO-D1.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4482	4482	4482
55	4288	4288	4288
65	4058	4058	4058
75	3371	3371	3371
85	2110	2110	2110

IES INDOOR REPORT
PHOTOMETRIC FILENAME : P4020-LED35-MO-D1.IES

CANDELA TABULATION

	<u>0</u>
0	1476.8
5	1467.7
10	1446.9
15	1410.5
20	1363.7
25	1302.6
30	1232.4
35	1151.8
40	1062.1
45	963.3
50	859.3
55	747.5
60	643.5
65	521.3
70	392.6
75	265.2
80	146.9
85	55.9
90	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : P4020-LED35-MO-D1.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	537.60	N.A.	13.00
0-30	1138.05	N.A.	27.50
0-40	1858.51	N.A.	44.90
0-60	3272.71	N.A.	79.10
0-80	4069.49	N.A.	98.30
0-90	4139.9	N.A.	100.00
10-90	4000.43	N.A.	96.60
20-40	1320.91	N.A.	31.90
20-50	2064.22	N.A.	49.90
40-70	1928.77	N.A.	46.60
60-80	796.78	N.A.	19.20
70-80	282.20	N.A.	6.80
80-90	70.41	N.A.	1.70
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	4139.9	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	139.47
10-20	398.13
20-30	600.45
30-40	720.46
40-50	743.30
50-60	670.90
60-70	514.57
70-80	282.20
80-90	70.41
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : P4020-LED35-MO-D1.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	94	97	94	91	94	91	89	90	88	86	84
2	99	91	84	78	96	89	82	77	85	80	75	82	77	74	79	75	72	70
3	90	80	71	65	88	78	70	64	75	68	63	72	67	62	70	65	61	59
4	82	70	62	55	80	69	61	54	67	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	43	36	63	51	42	36	49	41	36	48	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	44	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	26	52	39	32	26	38	31	26	37	31	26	36	30	26	24

POLAR GRAPH

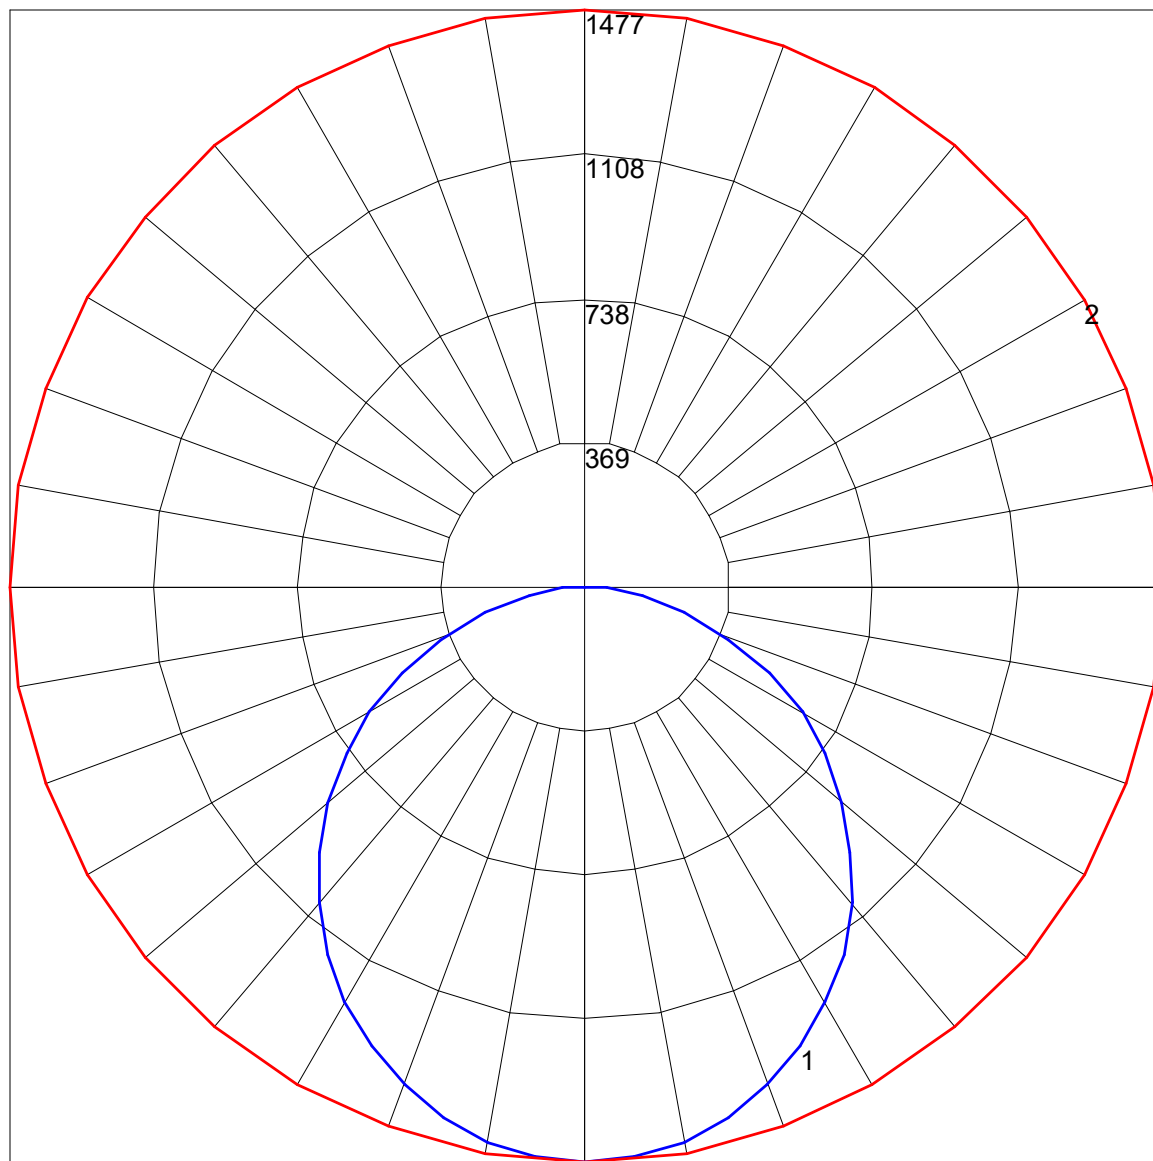

Maximum Candela = 1476.8 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)