



SSC-X3


Top-Swivel Stem Mount

INSTALLATION INSTRUCTIONS



PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

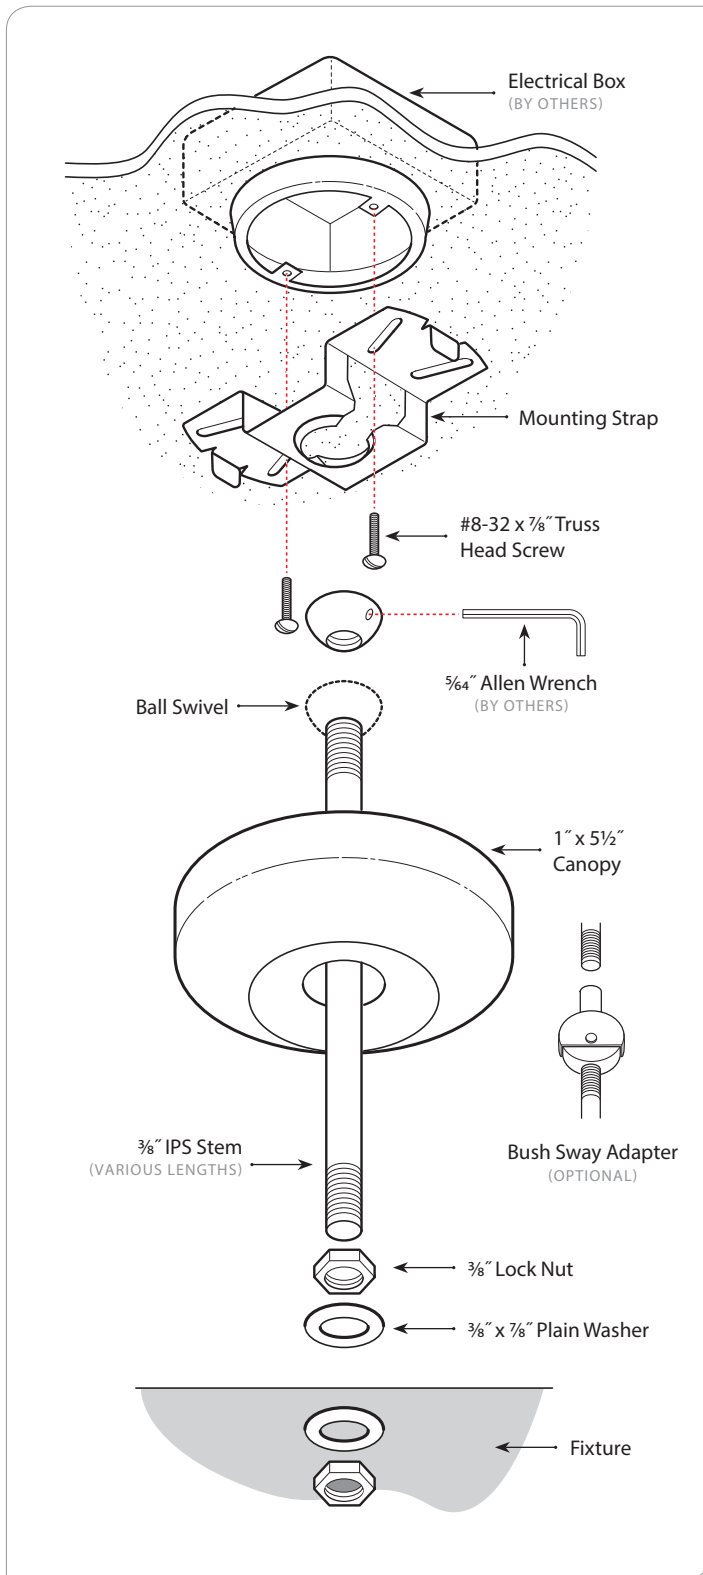


1. Use (2x) #8-32 x 7/8" screws to attach mounting strap to electrical box.
2. Screw ball swivel to one end to one end of threaded stem. Secure in place with set screw. Insert other end of stem through hole in canopy and fasten to fixture with 3/8" IPS lock nuts and washers.
3. Run wires through stem and raise fixture assembly to ceiling. Insert ball swivel into mounting strap.
4. Make all wiring connections per national and local building code requirements. Hand press canopy onto mounting straps.

SUPPORTS MAXIMUM WEIGHT OF 50 LBS

NOTE: Mounting strap will accommodate a 3" and 4" octagonal electrical box or a 4" square box with plaster ring.

NON-FEED MOUNTING:

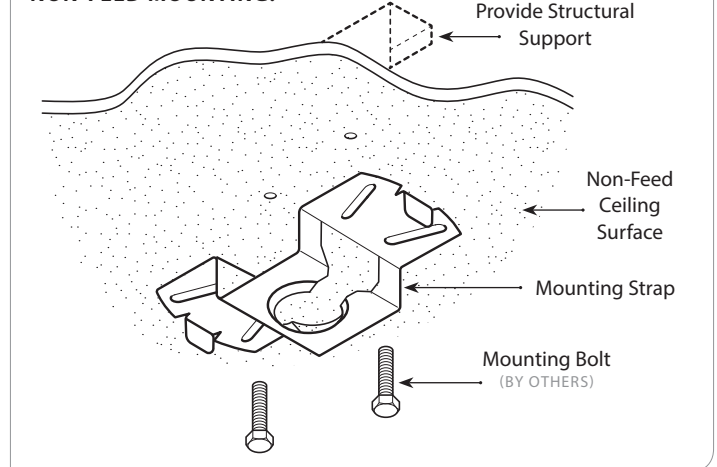

PART NUMBER	DESCRIPTION	QTY
100-00050-14	#8-32 x 7/8" Truss Head Screw	2
39157	#14 Gauge Mounting Strap	1
100-00508-01	3/8" ISP Ball Swivel	1
100-00085-07	1" x 5 1/2" Diameter Canopy	1
100-00008-14	3/8" x 7/8" Plain Washer	2
100-00013-14	3/8" Lock Nut	2
100-0005-08	Bush Sway Adapter	1

IPS STEM

76847	6" Long (Threaded Ends)	76851	36" Long (Threaded Ends)
76848	12" Long (Threaded Ends)	76852	48" Long (Threaded Ends)
76849	18" Long (Threaded Ends)	76853	60" Long (Threaded Ends)
76850	24" Long (Threaded Ends)	76854	72" Long (Threaded Ends)
77353	30" Long (Threaded Ends)	76855	96" Long (Threaded Ends)

WARNING: Ground fixture in accordance with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058