
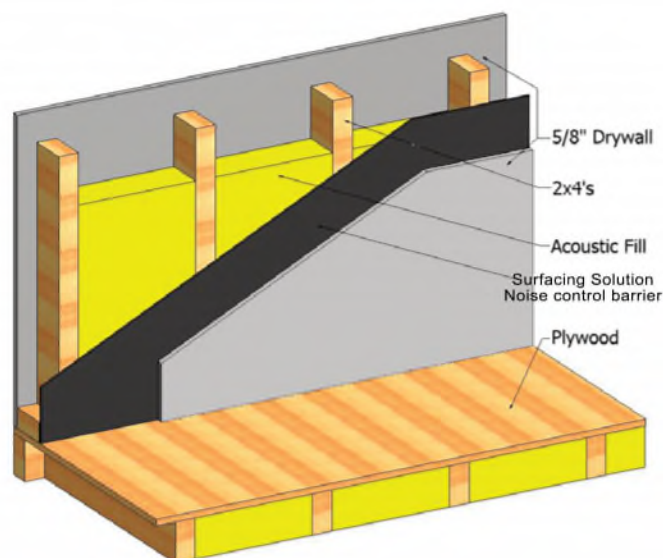
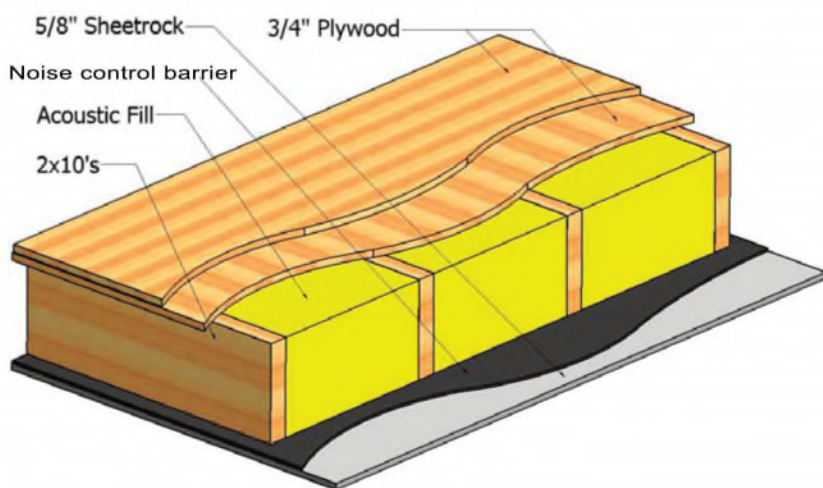




UL Rated Constructions

A good acoustic material must be manufactured to easily install into a wide range of applications as well as an effective sound barrier. Noise control barrier comes in range of roll sizes with the standard being a 4.5' x 20' roll. These rolls of barrier are easily handled on a job site and can be installed without the need for specialty tools.

Noise control barrier is UL listed for use in a wide range of wall and ceiling constructions. As a material that is listed for use in U300, U400, V400, L500 barrier should be your first choice for a safe, easy to use and most importantly quiet material.

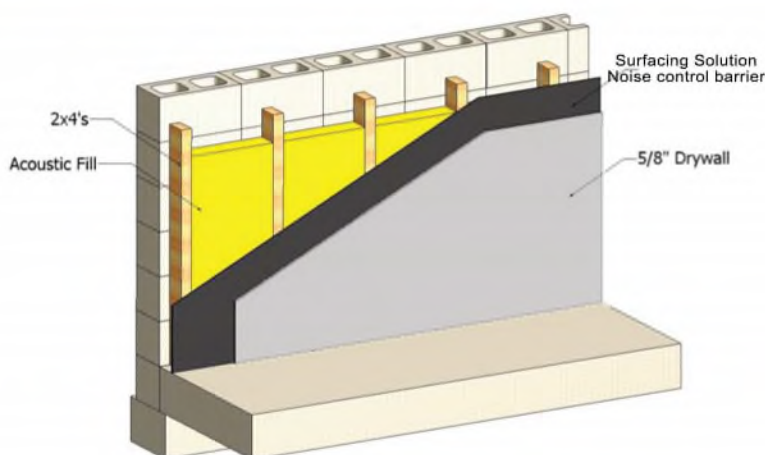

Transmission Loss

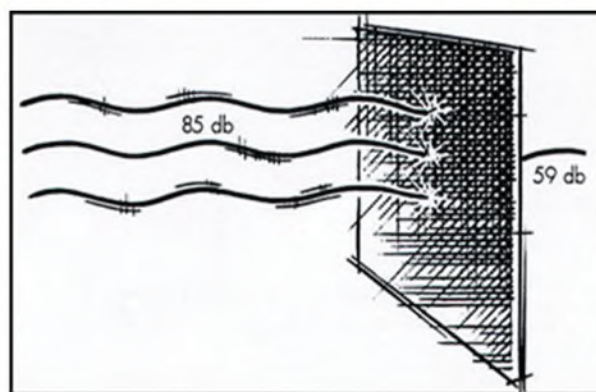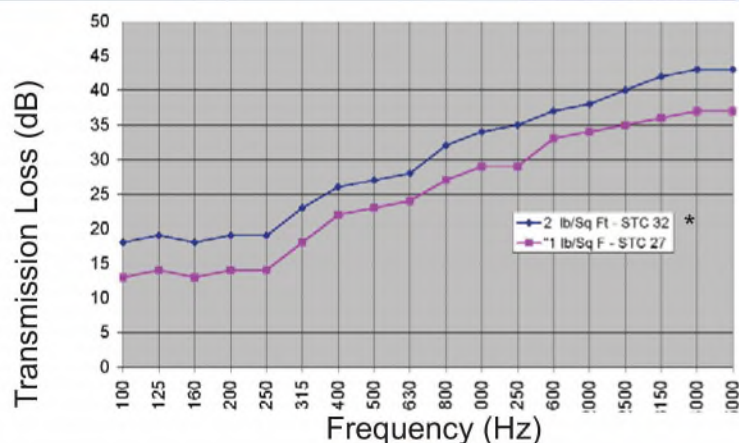

SurfacingSolution™

2480 Chaska Blvd. Chaska, MN 55318
800-964-6727 • 800-964-0630 fax
www.SurfacingSolution.com

1/8" Noise Control Barrier

Our noise control acoustic barrier is a specially developed flexible mass layer product designed to reduce air & structure borne noise transmission through walls, floors, & ceilings. Barrier is available in rolls that come in various weights & sizes to accommodate your acoustical needs. With STC ratings up to 32, Our barrier is ideal for use in hotels, homes, home theaters, classrooms, & any area where reduction of noise transmission is required.

ADVANTAGES

- Easy to use & install. A low cost solution for noise transmission problems.
- UL approved for U300, U400, V400, L500
- Ideal for installation on wood or metal framing.

APPLICATIONS

- Home Theaters
- New Construction
- Hotels
- Music Studios
- Homes, Condos, & Apartments
- Medical Facilities
- Classrooms

Solve your noise concerns. Call today to get it right the first time. We guarantee results!

(800)-964-6727



Effective in new or existing Construction



Acoustic Fill in between studs of privacy wall



Easily installed by a small crew without need for specialty tools

Standard Wall Assembly



STC 33

Standard Wall Assembly w/ 1/2" furring
1/8" thick Noise Control Barrier covered
with 1/2" sheet rock.



STC 45

Newly constructed wall with 1/8" barrier placed directly
on one side of the 2"x4" studs R-13 insulation and covered
with 1/2" sheet rock



STC 53



SurfacingSolution™

2480 Chaska Blvd. Chaska, MN 55318
800-964-6727 • 800-964-0630 fax
www.SurfacingSolution.com