



Overview

AP Solution HTD 0640 - HVAC Tie-Down secures your rooftop unit to the structure. Tie-downs can be installed with the system or retrofitted as needed.

Winds as light as 50-60 mph can dislodge your outdoor unit from its base, causing damage to the unit and your roof. The HTD 0640 keeps your unit safe from damage or costly repairs.

The U-Anchor 2000 Series attachments by Anchor Products have proven effective in securing HVAC equipment in harsh conditions from earthquakes to hurricanes.


ASCE 7-16 code requires all rooftop equipment to be bolted, welded, or otherwise positively fastened without consideration of frictional resistance.

Features:


- Attaches safely to single-ply, asphalt and coated roofs without damaging the roof using a U-Anchor 2000 Series Attachment
- U-Anchors can match roofing material type and brand
- The ultimate force resistance of each U-Anchor is approximately 3000 lbs. in tension and 4000 lbs. in shear
- The 3/16", 7x19 stainless steel wire rope offers a breaking strength of approx. 3700 lbs. *(Other wire rope options available upon request.)*
- The U-Anchor can be used with all HVAC Equipment
- Bracket, Straps, and cables are made of stainless steel and will not corrode on the roof
- U-Anchor is accepted by all major North American roofing manufacturers allowing warranties to remain in effect




**U-ANCHORS PROVIDE MAXIMUM STRENGTH
WITHOUT VOIDING YOUR
ROOF'S WARRANTY**

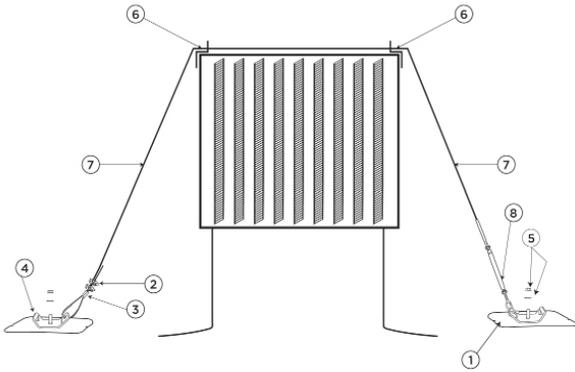


HVAC - Over The Unit Securement

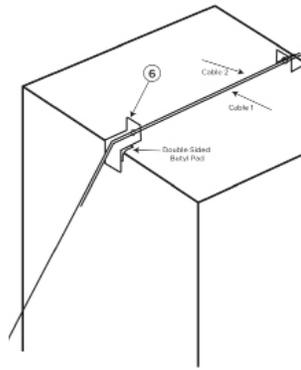

Corner Point

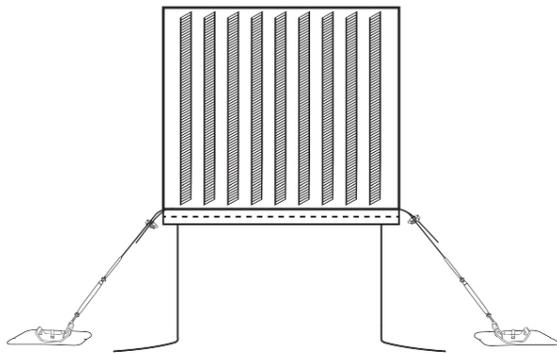

*Optional Base Securement
Using GWK 0600*

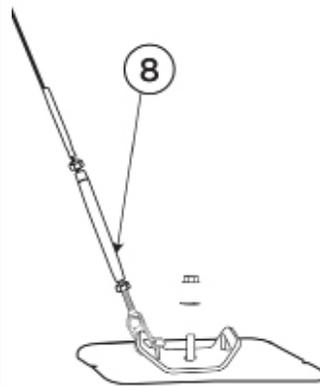

U-Anchor Securement Point

**HVAC SECUREMENT SYSTEM
INCLUDES:**

- 1- U-Anchor 2000 Series Attachment
- 2- Mechanical Crimp
- 3- Thimble
- 4- 30/30 Bracket
- 5- Stainless Steel Flanged Nut and Flat Washers
- 6- Corner Bracket
- 7- Aircraft Cable
- 8- Turn Buckle
- 9- Butyl Tape

ADVANTAGES

Quick and easy install.

Stainless Steel Straps and Cables ensure that the metal will not corrode or deteriorate in the harshest of environments.

The HVAC Securement, using the U-Anchors will not void roof manufacturers warranty.