


### Fully Adhered Membrane - Cover Board (MA) - Insulation (MA) - Wood Deck (New or Tear-Off)

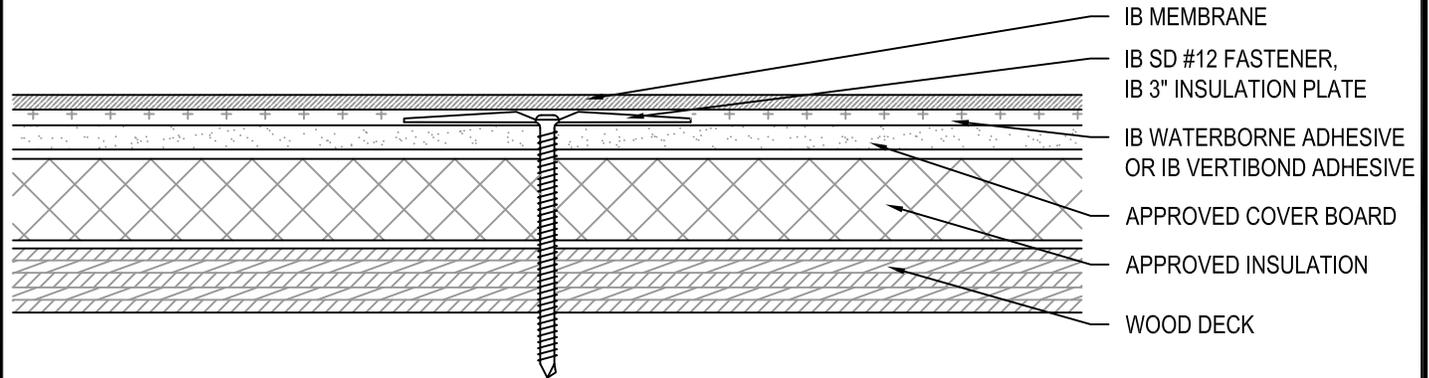

Fire Rating / Max. Slope	Deck Type	Cover Board / Insulation			IB Membrane Attachment	Max. Design Pressure**
		Type	Attachment	Fasteners		
<input type="checkbox"/> Class 'A' Unlimited	7/16" OSB	Min. 1/4" Approved Cover Board & Approved Insulation	Field: 16 per 4' x 8' (1 per 2 sq. ft.)	IB SD #12, IB 3" Insulation Plate	IB Waterborne or IB Vertibond Adhesive	Minimum Req. for IB Warranty
<input type="checkbox"/> Class 'A' Unlimited	1/2" Plywood	Min. 1/4" Approved Cover Board & Approved Insulation	Field: 12 per 4' x 8' (1 per 2.67 sq. ft.)	IB SD #12, IB 3" Insulation Plate	IB Waterborne or IB Vertibond Adhesive	Minimum Req. for IB Warranty
<input type="checkbox"/> Class 'A' Unlimited	7/16" OSB	Min. 1/2" Approved Cover Board & Approved Insulation	Field: 12 per 4' x 8' (1 per 2.67 sq. ft.)	IB SD #12, IB 3" Insulation Plate	IB Waterborne or IB Vertibond Adhesive	Minimum Req. for IB Warranty
<input type="checkbox"/> Class 'A' Unlimited	1/2" Plywood	Min. 1/2" Approved Cover Board & Approved Insulation	Field: 10 per 4' x 8' (1 per 3.2 sq. ft.)	IB SD #12, IB 3" Insulation Plate	IB Waterborne or IB Vertibond Adhesive	Minimum Req. for IB Warranty
<input type="checkbox"/> Class 'A' Unlimited	1/2" Plywood	Min. 1/4" Approved Cover Board & Approved Insulation	Field: 20 per 4' x 8' (1 per 1.6 sq. ft.)	IB SD #12, IB 3" Insulation Plate	IB Waterborne or IB Vertibond Adhesive	-45.0 psf (Class 90)

**Approved Cover Board:** Dens Deck Prime, Securock Gypsum-Fiber Roof Board, minimum 1/4" thickness.

**Approved Insulation:** IB Energy Board II & III or IB Approved UL Classified Polyisocyanurate, Expanded Polystyrene, Extruded Polystyrene Insulation.

\*\* Refer to Substrate Resistance table for required pull-out values.

For additional information about IB Roof Systems requirements, recommendations, installation details, approvals and limitations for the above assemblies, please refer to the latest edition of the IB Roof Systems Specifications Manual. For Technical Services please contact us at 800-426-1626.

Membranes:	Colors:	Warranties:	Warranty Lengths:
<input type="checkbox"/> 50 Mil Membrane	<input type="checkbox"/> White* <input type="checkbox"/> Cool Sand* <input type="checkbox"/> ChemGuard*	<input type="checkbox"/> Total System (NDL)	<input type="checkbox"/> 10 yr (50, 60, and 80 mil)
<input type="checkbox"/> 60 Mil Membrane	<input type="checkbox"/> Gray <input type="checkbox"/> Green <input type="checkbox"/> Red	<input type="checkbox"/> Warranty Plus	<input type="checkbox"/> 15 yr (50, 60, and 80 mil)
<input type="checkbox"/> 80 Mil Membrane	<input type="checkbox"/> Tan <input type="checkbox"/> Brown <input type="checkbox"/> Custom: _____	<input type="checkbox"/> Commercial Limited Material	<input type="checkbox"/> 20 yr (60 and 80 mil)
	* Meets CRRC, Title-24, & EnergyStar Standards	<input type="checkbox"/> Lifetime Residential Limited Material	<input type="checkbox"/> 25 yr (80 mil)

**Submitted By:**  
 Address:  
 Telephone:

**Project Name:**  
 Address:

