



Round (RPM)/Square (SPM) Canopies

Bolt Shapes, C, O, Zenith, Olive-30, P3614-22, P3918-30, P4018-30, Quad-22-33 & Quad Frame 22-33

(These fixtures are **UNDER** 50 lbs)








PRUDENTIAL LTG.

PRULITE.COM 213.746.0360

INSTALLATION INSTRUCTIONS

PART	PART NO.	DESCRIPTION
CANOPY BODIES:		
	100-00071-03	Round
	100-00072-03	Square
CANOPY COVERS:		
	105760	Single Feed
	105892	Dual Feed
	105597	Support Ring
	100-00183-10	Insulation Ring
	100-00144-09	Romex Clamp
	105717	Romex Clamp Bracket
	100-00145-09	Romex Clamp — NPT 3/4" (Dual Feed)
	106029	Romex Clamp Bracket — NPT 3/4" (Dual Feed)
DUAL FEED BUSHINGS:		
	100-00184-10	Black
	100-00185-10	White

PART	PART NO.	DESCRIPTION
POWER CORDS:		
	100-00023-09	3-Wire
	100-00024-09	4-Wire
	100-00912-09	5-Wire
	100-01002-09	6-Wire
		SJT Power Cord
CABLE KITS:		
	100-00135-08	48"
	100-00142-08	96" 5/64" Galvanized Cable & 1/4" Ball 1/4" Nut & Gripper
	100-00143-08	144"
	100-00449-09	Grounding Wire 7"
	100-00187-14	#8-32 x 3/8" HHWSL GREEN Ground Screw
	100-00047-14	#8-32 x 3/8" HWH SL Self-Tap Screws
	100-00024-20	8 x #6-32 x 3/8" Phillips Pan Head. Type F Screw

WARNING: Ground fixture in according with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



Round (RPM)/Square (SPM) Canopies

Bolt Shapes, C, O, Zenith, Olive-30, P3614-22, P3918-30, P4018-30, Quad-22-33 & Quad Frame 22-33


(These fixtures are **UNDER** 50 lbs)



PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

INSTALLATION INSTRUCTIONS





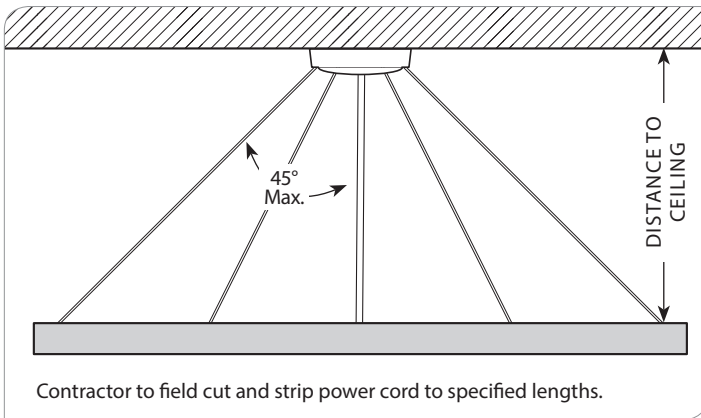


MOUNTING LOCATIONS

ROUND:

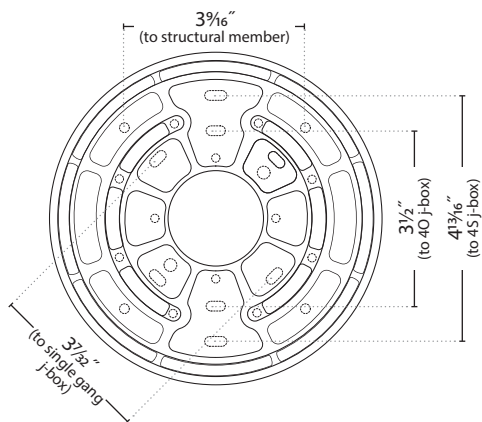

SQUARE:

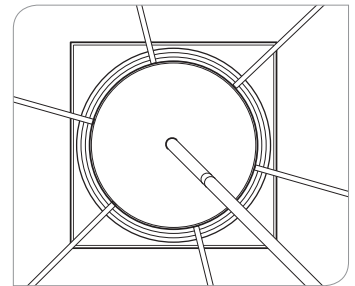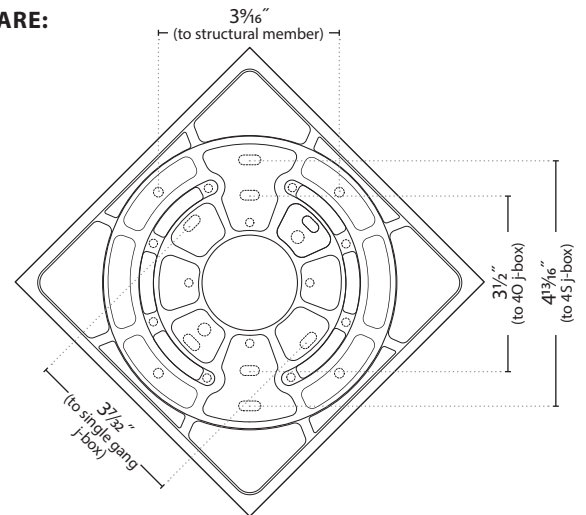

WARNING: Ground fixture in according with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved – All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058



Round (RPM)/Square (SPM) Canopies

Bolt Shapes, C, O, Zenith, Olive-30, P3614-22, P3918-30, P4018-30, Quad-22-33 & Quad Frame 22-33

(These fixtures are **UNDER** 50 lbs)




PRUDENTIAL LTG.


PRULITE.COM 213.746.0360

INSTALLATION INSTRUCTIONS

1) Mount Canopy Body to ceiling.


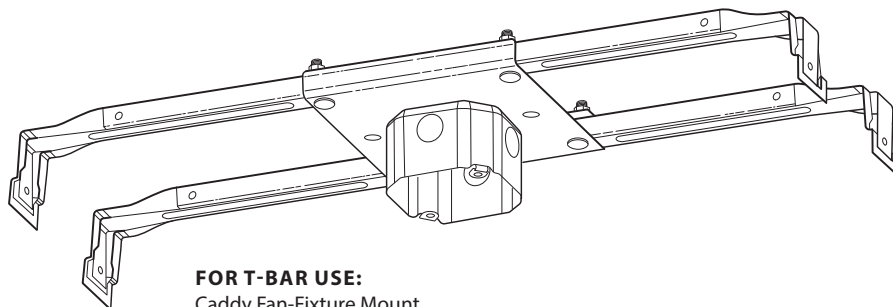


FOR T-BAR USE:
Caddy Fan-Fixture Mount
(BY OTHERS)

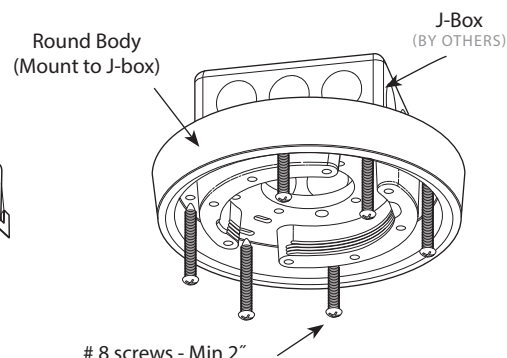

OPTIONAL: Mount to structural members on fixtures over 50 lbs (BY OTHERS)
For fixtures over 50 lbs see separate manual

2) Pass cables through Insulation Ring. Follow location chart (below).

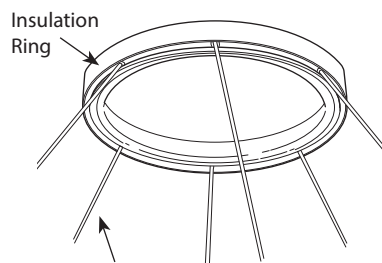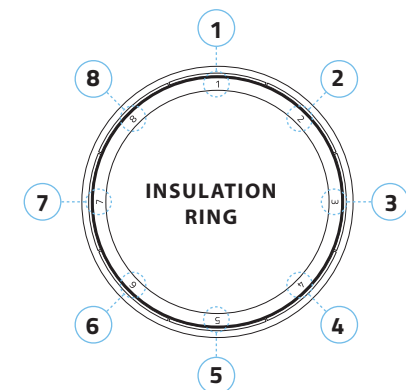


FIXTURE CABLE:
Variable quantity, see table


Cable Quantities & Locations

CABLE QTY	CHAMBERS
3	1, 4, 6
4	1, 3, 5, 7
5	1, 3, 4, 6, 7
6	1, 2, 4, 5, 6, 8


3) Fix Insulation Ring. Make sure cables will keep the fixture in the desired orientation / alignment.

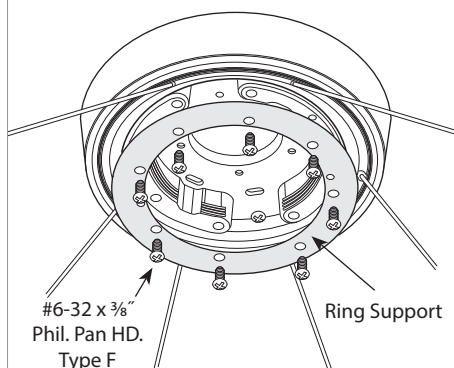


5) Install cover. Turn cover clockwise, do not overtighten

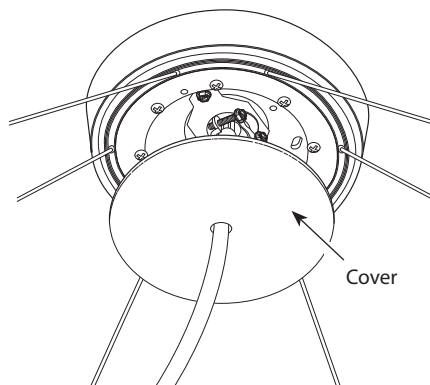


4) Make all power connections. Fix power cord to canopy with the Romex Clamp

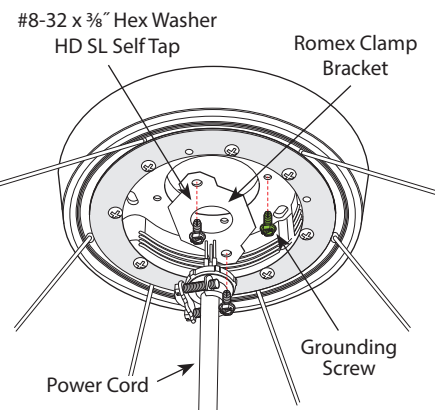

SINGLE FEED:



DUAL FEED:



6) Hang and connect fixture per fixture instructions.

WARNING: Ground fixture in according with local and national electrical codes. Failure to do so may result in serious personal injury.



Prudential Ltg. reserves the right to change design specifications or materials without notice. Please visit prulite.com for most current data.
© 2015 All rights reserved - All products manufactured at: Prudential Ltg. 1774 E. 21st Street, Los Angeles, CA 90058