

Features

- Air-Dielectric design
- Cable Sizes ½” through 1-5/8” Diameters, Aluminum Outer Conductor, Jacketed to Meet Customers’ Low Smoke, Non-Halogenated Fire-Retardant Wireless Applications, Gray Jacket
- For use 150 MHz through 2700 MHz

Performance Standards

- NFPA-70, Article 810, Communication Systems, UL1666, UL-444, CMR
- IEC 60332-1, IEC 60332-3C
- TL9000 H-V - All Cables designed and manufactured under this quality management system
- RoHS 2011/65/EU Compliant


Physical Dimensions	
Center Diameter, in (mm)	0.383 (9.73)
Diameter Over Dielectric, in (mm)	0.980 (24.89)
Diameter Over Outer Conductor, in (mm)	1.007 (25.58)
Maximum Diameter Over Jacket, in (mm)	1.154 (29.31)
Center Conductor	Solid Copper Tube
Outer Conductor	Dual Slotted Solid Aluminum Tube
Mechanical Characteristics	
Minimum Bend Radius, in (mm) - Single	5 (127)
Cable Weight, lb/ft (kg/m)	0.40 (0.59)
Tensile Strength, lb (kg)	734 (333.6)
Flat Plate Crush, lb/in (kg/mm)	132 (2.36)
Recommended Install Temp., °F (°C)	-10° to 170° (-23° to 77°)
Recommended Storage Temp., °F (°C)	-40° to 170° (-40° to 77°)
Recommended Operating Temp., °F (°C)	-40° to 170° (-40° to 77°)

Scope

Trilogy® radiating cables are meticulously engineered to excel in environments where conventional cables may fall short. These cables possess the distinctive capability to emit radio frequency signals along their length, rendering them particularly suitable for applications such as subterranean tunnels, expansive buildings, and transportation systems where comprehensive signal coverage is imperative.

The sophisticated construction of radiating cables includes precise perforations that facilitate controlled RF leakage, thereby ensuring consistent signal strength across extensive areas. Designed to withstand harsh conditions, these cables offer exceptional durability and adaptability, further reinforced by adherence to TL9000 H-V standards.

Its low coupling loss and superior attenuation characteristics make it ideal for environments where maximum data transmission speed and reliability are paramount. The use of an air dielectric disc design ensures there is zero water migration, maintaining signal integrity and quality. Additionally, the cable is domestically manufactured and complies with Title 49, reinforcing its adherence to the Buy America standards.

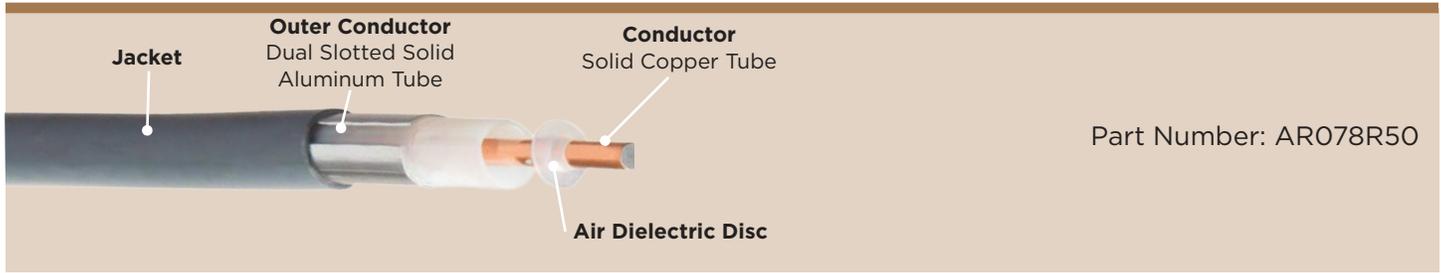

Electrical Characteristics	
Maximum Frequency, GHz	5
Peak Power Rating, KW	90
Capacitance, pF/ft (m)	22.3 (73.16)
Inductance, μ H/ft (m)	0.056 (0.184)
VSWR min, (dB)	1.38 (16.0)
VSWR in-band, (dB)	1.30 (17.7)
Impedance, Ohms	50 \pm 2
Velocity of Propagation	91%
Stop Bands, MHz`	1360 - 1400

Electrical Performance			
Frequency MHz	Attenuation		Coupling Loss 95%, dB
	dB/100 ft	dB/100 m	
150	0.47	1.55	75 (78)
450	0.90	2.94	75 (78)
500	0.96	3.13	82 (85)
700	1.18	3.88	81 (83)
800	1.28	4.21	84 (84)
900	1.36	4.46	83 (86)
1000	1.42	4.66	87 (88)
1700	1.90	6.24	85 (86)
1800	1.92	6.31	83 (85)
1900	1.97	6.46	86 (88)
2000	2.02	6.63	86 (88)
2100	2.09	6.86	87 (88)
2200	2.17	7.12	86 (87)
2400	2.36	7.74	85 (86)
2600	2.62	8.60	84 (86)
2700	2.69	8.82	83 (85)

Notes:

- Coupling Loss and Attenuation Values are measured in accordance with the IEC 61196-4 Free Space Test Method
- Coupling Loss values are measured with a radial (below 1100 MHz) or orthogonal (above 1100 MHz) orientated dipole antenna
- The Coupling Loss values in parentheses are the mean values of all three spatial orientations (radial, parallel and orthogonal) of dipole antenna
- Coupling Loss Tolerance of \pm 10 dB at 6 ft (2m), 95%
- Attenuation Tolerance of \pm 10% at 68°F
- As is the case with all radiating cables, performance in RF confined areas may differ from values in a free space.