

Features

- Air-Dielectric design
- Cable Sizes 1/2” through 1-5/8” Diameters, Aluminum Outer Conductor, Jacketed to Meet Customers’ Outdoor Wireless Applications, Black Jacket

Performance Standards

- TL9000 H-V - All Cables designed and manufactured under this quality management system
- RoHS 2011/65/EU Compliant

Scope


Trilogy® Transline Cable represents a significant advancement in transmission line cable technology.

The cable’s innovative design provides exceptional RF performance, low attenuation, and superior durability, which are critical for modern telecommunications systems. Its air dielectric design prevents water migration and enhances signal quality, ensuring reliable service in various environments.

Furthermore, adherence to the TL9000 H-V quality management system standards signifies that the cable has undergone rigorous testing and manufacturing processes, ensuring that it meets the highest industry benchmarks for reliability and performance.

Physical Dimensions	
Center Diameter, in (mm)	0.383 (9.73)
Diameter Over Dielectric, in (mm)	0.980 (24.89)
Diameter Over Outer Conductor, in (mm)	1.007 (25.58)
Maximum Diameter Over Jacket, in (mm)	1.092 (27.74)
Center Conductor	Solid Copper Tube
Outer Conductor	Solid Aluminum Tube
Jacket Color	Black

Mechanical Characteristics	
Minimum Bend Radius, in (mm) - Single	5 (127)
Minimum Bend Radius, in (mm) - Multiple	10 (254)
Cable Weight, lb/ft (kg/m)	0.32 (0.48)
Tensile Strength, lb (kg)	734 (333.6)
Flat Plate Crush, lb/in (kg/mm)	132 (2.36)
Number of Bends	20
Recommended Install Temp., °F (°C)	-10° to 170° (-23° to 77°)
Recommended Storage Temp., °F (°C)	-40° to 170° (-40° to 77°)
Recommended Operating Temp., °F (°C)	-40° to 170° (-40° to 77°)

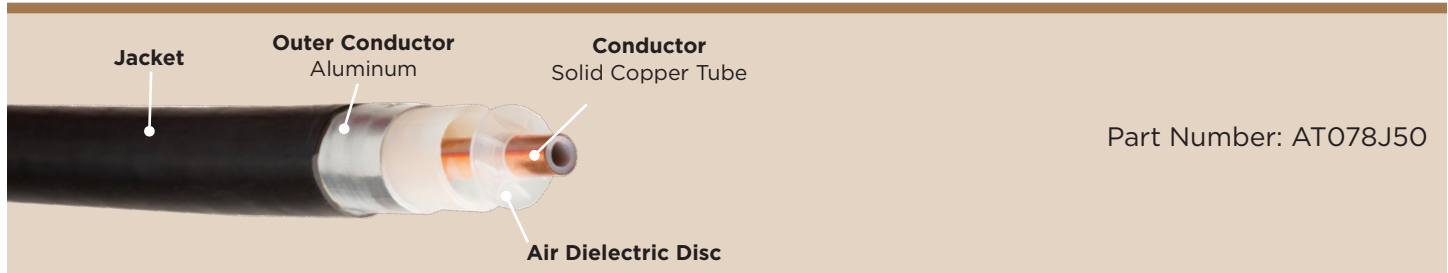

Electrical Characteristics	
Maximum Frequency, GHz	5
Peak Power Rating, KW	90
Capacitance, pF/ft (m)	22.3 (73.16)
Inductance, μ H/ft (m)	0.056 (0.184)
VSWR min. (dB)	1.25 (19.0)
Impedance, Ohms	50 +/- 2
Velocity of Propagation	91%

Standard Conditions
For Attenuation: VSWR 1.0, Ambient Temperature 20°C (68°F)
For Average Power: VSWR 1.0, Ambient Temperature 40°C (104°F), Inner Conductor Temperature 100°F (212°F), No Solar Loading

Attenuation and Average Power			
Frequency MHz	Attenuation dB/100 ft	Attenuation dB/100 m	Coupling Loss 95%, dB
100	0.33	1.08	6.31
108	0.34	1.12	6.07
150	0.40	1.31	5.13
174	0.44	1.44	4.76
200	0.47	1.54	4.44
300	0.59	1.94	3.61
400	0.69	2.26	3.11
450	0.73	2.40	2.93
500	0.78	2.56	2.78
512	0.79	2.59	2.74
600	0.86	2.82	2.53
700	0.94	3.08	2.33
800	1.01	3.31	2.18
824	1.03	3.38	2.15
894	1.08	3.54	2.06
960	1.12	3.67	1.98
1000	1.15	3.77	1.94
1250	1.30	4.27	1.73
1500	1.45	4.76	1.57
1800	1.61	5.28	1.55
1900	1.67	5.48	1.53
2000	1.72	5.64	1.35
2300	1.87	6.14	1.25
3000	2.20	7.22	1.09